


# HIGH AVAILABILITY CONFIGURATION DUAL WAN LINKS

In-Path 2

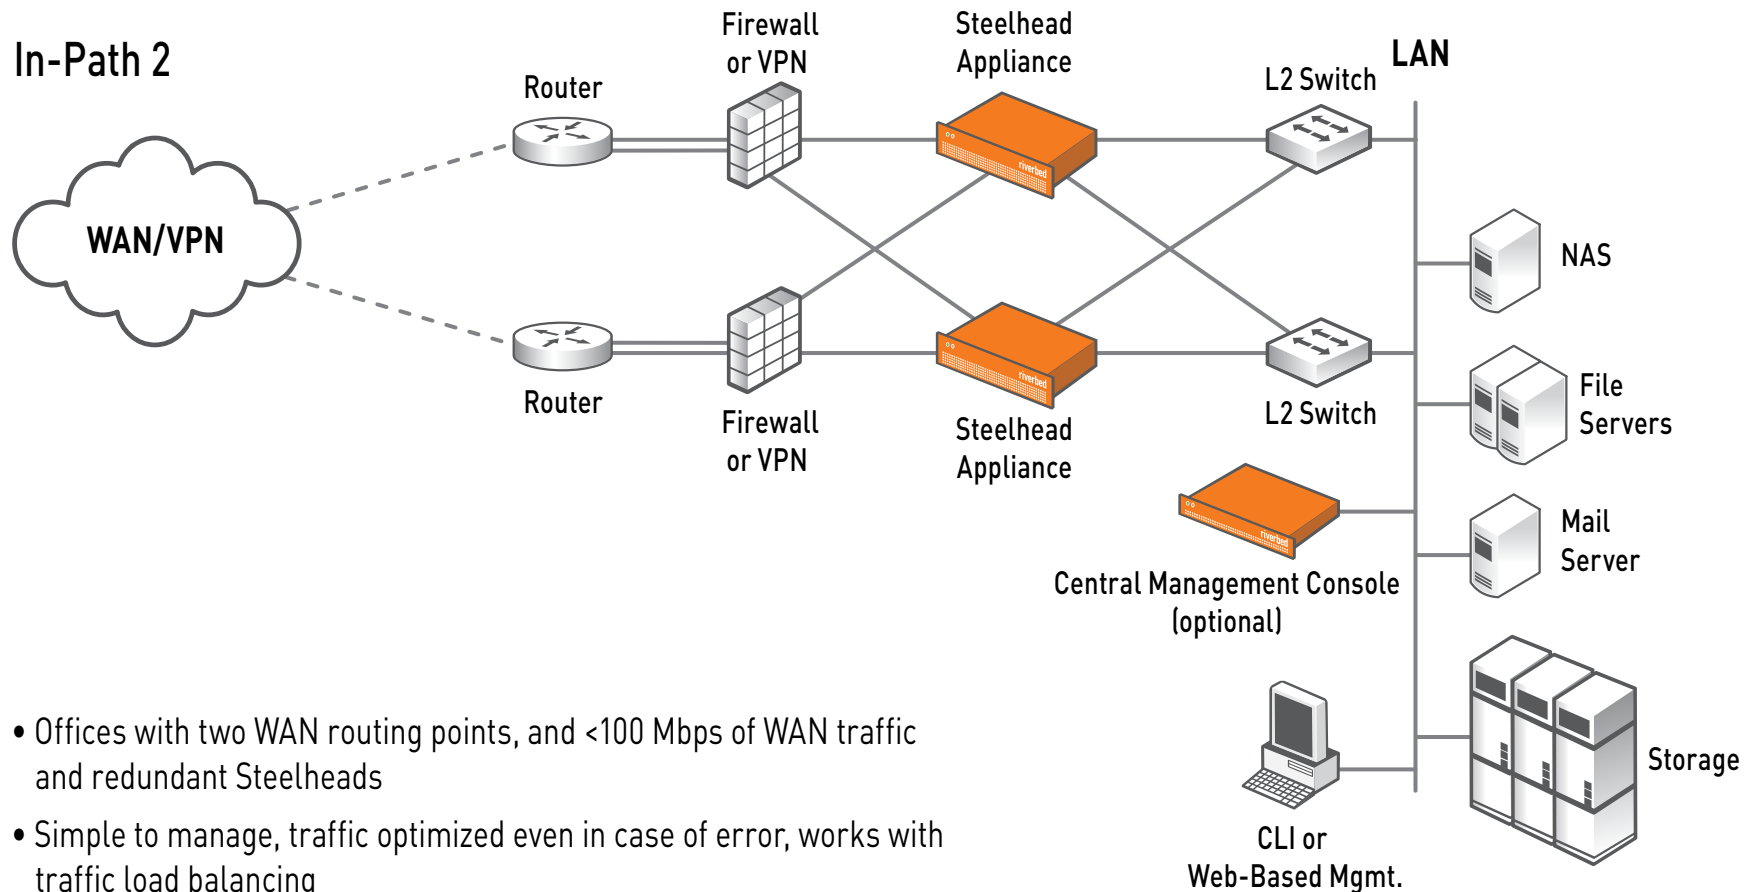

- Offices with two WAN routing points, and <100 Mbps of WAN traffic and redundant Steelheads
- Simple to manage, traffic optimized even in case of error, works with traffic load balancing
- Router IGP configuration required